

SignalLED Recessed


The **SignalLED** range of LED exit sign luminaires offer long life, low energy and flexible mounting solutions in a choice of attractive, maintained packages.

The recessed luminaires have conventional styling but with all the size and performance benefits provided from the latest LED technology. The luminaires feature a unique method of fitting legend 'screens' onto the face of the acrylic panel.

All **SignalLED** luminaires incorporate long life high brightness white LEDs with typical life expectancy of over 50,000 hours. DALI and Self-test versions are also available.



Although recessed **SignalLED** luminaires have a similar appearance to conventional recessed exit signs these LED fittings are much smaller and make installations far more attractive. The housing has adjustable arms to simplify installation into different thickness supporting surfaces and the visible ceiling plate is available with a choice of finishes. As with the suspended **SignalLED** luminaires the recessed versions are supplied with integral Maintained emergency lighting control gear powering 15 high brightness white LEDs which clearly and evenly illuminate the safety sign legends. All **SignalLED** luminaires comply with the relevant requirements of EN60598.2.22

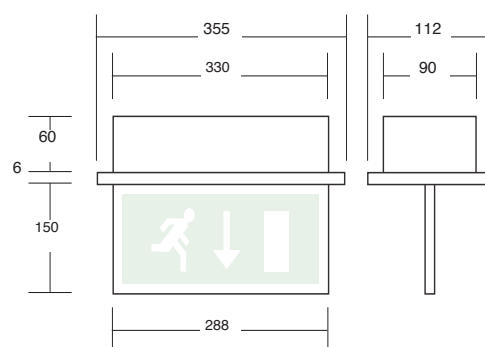

GENERAL SPECIFICATION

Operation	Maintained
Light Source	15 Long life white LEDs
Battery	4.8V 1.1Ah NiCd
Charge Current	200mA nominal
Recharge Period	24hrs (14hrs for 1hr duration)
Input Voltage	230V \pm 10% ~ 50Hz
Power	12VA
IP Rating	IP20

ORDER CODES

DESCRIPTION

RLD/M3/WH Recessed LED exit sign Maintained White painted ceiling plate

OPTIONS: **/DALI** DALI or Self-Test emergency operation
/BL Black finish

LEGENDS: **/ECAR** EC Format — Arrow Right
/ECAL EC Format — Arrow Left
/ECAD EC Format — Arrow Down
/ISOAR ISO Format — Arrow Right
/ISOAL ISO Format — Arrow Left
/ISOAU ISO Format — Arrow Up